





MORE ON
OUR WEBSITE

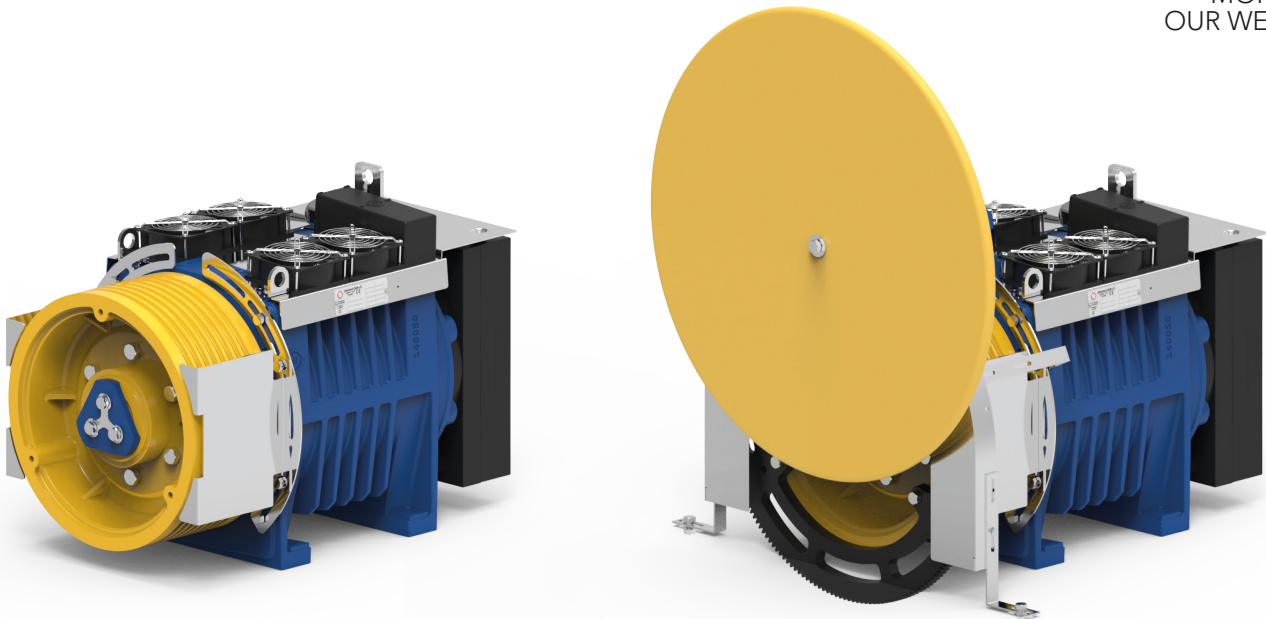

Carico Statico
Static Load
Charge Statique
Statische Belastung
Carga Estática



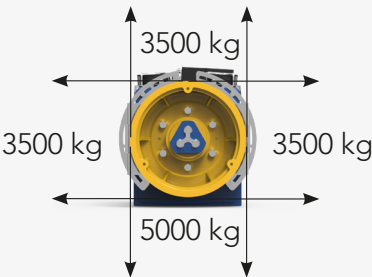


Peso
Weight
Poids
Gewicht
Peso



539 kg

Momento Torcente Nominal Torque Torsions moment Drehmoment Par de Torsión	Coppia di corto circuito Short circuited torque Couple court-circuité Drehmoment kurzgeschlossen Par cortocircuitado	Poli Poles Poles Pole Polos	Encoder	Cavo motore Motor Cable Câble du moteur Motor Kabel Cable para motor
Nm	Nm			m
1050 S5 - 40% ED 180 s/h	1250	16	Endat Sincos SSI BISS	10
Freno - Brake - Frein - Bremse - Freno				
RTW1000 [2x1200Nm] 2X158W - 207V _{DC}				
Telaio Bedplate Chassis Maschinenrahmen Bancada				#208

		Funi - Ropes - Cables Seilen - Cables			Dimensioni - Dimensions Mesures - Abmessungen - Tamaños
ØD	F	Ø	min - max	Pitch	A
mm	mm	mm	n°	mm	mm
320	180	8	3 - 10	17	153
400		10			
480		12	3 - 9	20	
520	145	13	3 - 7		

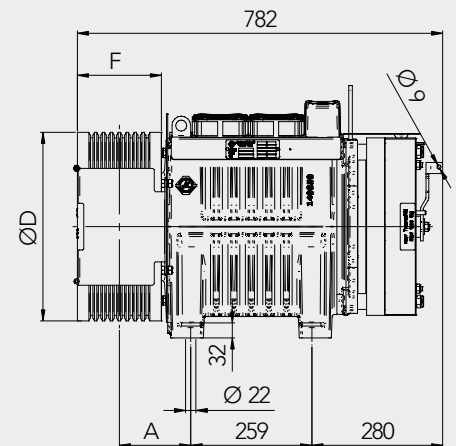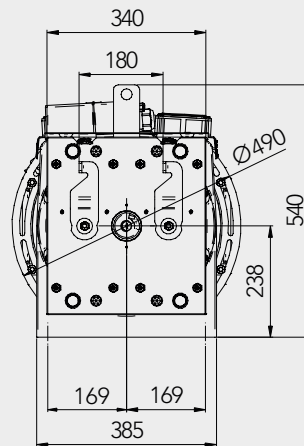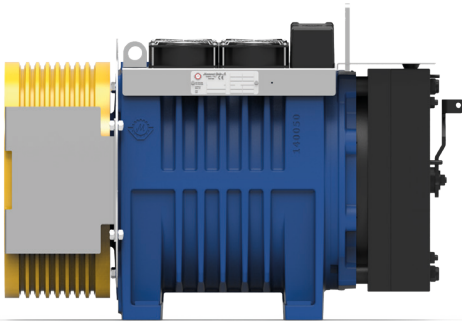

Machine Room Use

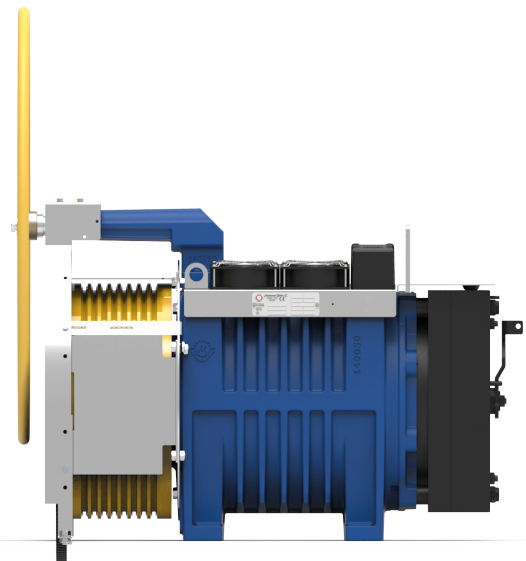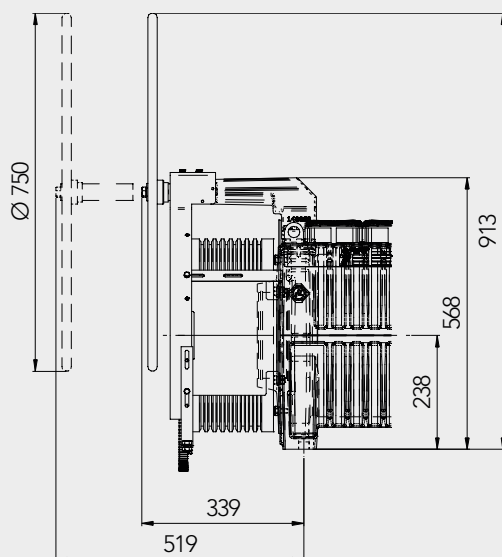

	Portata Load Charge Nutzlast Carga		Ø	Funi Ropes Cables Seilen Cables	Passo Pitch Pas RA Paso	Coppia Torque Couple Drehmoment Par de torsión	Potenza Power Puissances Leistungen Potencia	Giri RPM Tours Drehzahl RPM	Freq.	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinentyp Máquina	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinentyp Máquina
	kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A		A	
1:1	630	0,63	320	10xØ8	17	656	2,6	37,6	5,0	13,1	MGV34200483CO14	26,8	MGV34201803CO14
			400	10xØ10	17	819	2,6	30,1	4,0	16,4	MGV34200483CO14	33,6	MGV34201803CO14
			480	9xØ12	20	983	2,6	25,1	3,3	19,7	MGV34200483CO14	40,3	MGV34201803CO14
			520	6xØ13	20	1050	2,5	23,1	3,1	21,0	MGV34200483CO14	43,0	MGV34201803CO14
		1	320	10xØ8	17	656	4,1	59,7	8,0	13,1	MGV34200753CO14	26,8	MGV34201803CO14
			400	10xØ10	17	819	4,1	47,7	6,4	16,4	MGV34200483CO14	33,6	MGV34201803CO14
			480	9xØ12	20	983	4,1	39,8	5,3	19,7	MGV34200483CO14	40,3	MGV34201803CO14
			520	6xØ13	20	1050	4,0	36,7	4,9	21,0	MGV34200483CO14	43,0	MGV34201803CO14
		1,6	320	10xØ8	17	656	6,6	95,5	12,7	19,0	MGV34201203CO14	35,6	MGV34202393CO14
			400	10xØ10	17	819	6,6	76,4	10,2	23,8	MGV34201203CO14	33,6	MGV34201803CO14
			480	9xØ12	20	983	6,6	63,7	8,5	19,7	MGV34200753CO14	40,3	MGV34201803CO14
			520	6xØ13	20	1050	6,5	58,8	7,8	21,0	MGV34200753CO14	43,0	MGV34201803CO14
		2	320	10xØ8	17	656	8,2	119,4	15,9	19,0	MGV34201203CO14	35,6	MGV34202393CO14
			400	10xØ10	17	819	8,2	95,5	12,7	23,8	MGV34201203CO14	44,5	MGV34202393CO14
			480	9xØ12	20	983	8,2	79,6	10,6	28,6	MGV34201203CO14	40,3	MGV34201803CO14
			520	6xØ13	20	1050	8,1	73,5	9,8	21,0	MGV34200753CO14	43,0	MGV34201803CO14
		2,5	320	10xØ8	17	656	10,2	149,2	19,9	26,8	MGV34201803CO14	53,1	MGV34203803CO14
			400	10xØ10	17	819	10,2	119,4	15,9	23,8	MGV34201203CO14	44,5	MGV34202393CO14
			480	9xØ12	20	983	10,2	99,5	13,3	28,6	MGV34201203CO14	53,4	MGV34202393CO14
			520	6xØ13	20	1050	10,1	91,8	12,2	30,5	MGV34201203CO14	57,0	MGV34202393CO14
		3	320	10xØ8	17	656	12,3	179,0	23,9	26,8	MGV34201803CO14	53,1	MGV34203803CO14
			400	10xØ10	17	819	12,3	143,2	19,1	33,6	MGV34201803CO14	66,3	MGV34203803CO14
			480	9xØ12	20	983	12,3	119,4	15,9	28,6	MGV34201203CO14	53,4	MGV34202393CO14
			520	6xØ13	20	1050	12,1	110,2	14,7	30,5	MGV34201203CO14	57,0	MGV34202393CO14
	800	0,63	320	10xØ8	17	812	3,2	37,6	5,0	16,2	MGV34200483CO14	33,3	MGV34201803CO14
			400	10xØ10	17	1016	3,2	30,1	4,0	20,3	MGV34200483CO14	41,6	MGV34201803CO14
		1	320	10xØ8	17	812	5,1	59,7	8,0	16,2	MGV34200753CO14	33,3	MGV34201803CO14
			400	10xØ10	17	1016	5,1	47,7	6,4	20,3	MGV34200483CO14	41,6	MGV34201803CO14
		1,6	320	10xØ8	17	812	8,1	95,5	12,7	23,6	MGV34201203CO14	44,1	MGV34202393CO14
			400	10xØ10	17	1016	8,1	76,4	10,2	29,5	MGV34201203CO14	41,6	MGV34201803CO14
		2	320	10xØ8	17	812	10,2	119,4	15,9	23,6	MGV34201203CO14	44,1	MGV34202393CO14
			400	10xØ10	17	1016	10,2	95,5	12,7	29,5	MGV34201203CO14	55,1	MGV34202393CO14
		2,5	320	10xØ8	17	812	12,7	149,2	19,9	33,3	MGV34201803CO14	65,8	MGV34203803CO14
			400	10xØ10	17	1016	12,7	119,4	15,9	29,5	MGV34201203CO14	55,1	MGV34202393CO14
		3	320	10xØ8	17	812	15,2	179,0	23,9	33,3	MGV34201803CO14	65,8	MGV34203803CO14
			400	10xØ10	17	1016	15,2	143,2	19,1	41,6	MGV34201803CO14	82,2	MGV34203803CO14
	1000	0,63	240	10xØ6,5	12	748	3,9	50,1	6,7	15,0	MGV34200753CO14	30,6	MGV34201803CO14
			320	10xØ8	17	997	3,9	37,6	5,0	19,9	MGV34200483CO14	40,8	MGV34201803CO14
		1	240	10xØ6,5	12	748	6,2	79,6	10,6	21,7	MGV34201203CO14	30,6	MGV34201803CO14
			320	10xØ8	17	997	6,2	59,7	8,0	19,9	MGV34200753CO14	40,8	MGV34201803CO14
		1,6	240	10xØ6,5	12	748	10,0	127,3	17,0	30,6	MGV34201803CO14	60,5	MGV34203803CO14
			320	10xØ8	17	997	10,0	95,5	12,7	29,0	MGV34201203CO14	54,1	MGV34202393CO14
		2	240	10xØ6,5	12	748	12,5	159,2	21,2	30,6	MGV34201803CO14	60,5	MGV34203803CO14
			320	10xØ8	17	997	12,5	119,4	15,9	29,0	MGV34201203CO14	54,1	MGV34202393CO14
		2,5	240	10xØ6,5	12	748	15,6	198,9	26,5	41,3	MGV34202393CO14	77,6	MGV34202402CO14
			320	10xØ8	17	997	15,6	149,2	19,9	40,8	MGV34201803CO14	80,7	MGV34203803CO14
		3	240	10xØ6,5	12	748	18,7	238,7	31,8	41,3	MGV34202393CO14	77,6	MGV34202402CO14
			320	10xØ8	17	997	18,7	179,0	23,9	40,8	MGV34201803CO14	80,7	MGV34203803CO14

	Portata Load Charge Nutzlast Carga		Ø	Funi Ropes Cables Seilen Cables	Passo Pitch Pas RA Paso	Coppia Torque Couple Drehmoment Par de torsión	Potenza Power Puissances Leistungen Potencia	Giri RPM Tours Drehzahl RPM	Freq.	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinentyp Máquina	Corrente Current Courant Strom Corriente	Macchina Machine Machine Maschinentyp Máquina
	kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A		A	
2:1	1250	0,63	320	10xØ8	17	651	5,1	75,2	10,0	13,0	MGV34200753CO13	26,7	MGV34201803CO14
			400	10xØ10	17	814	5,1	60,2	8,0	16,3	MGV34200753CO13	33,3	MGV34201803CO14
			480	9xØ12	20	976	5,1	50,1	6,7	19,5	MGV34200753CO13	40,0	MGV34201803CO14
			520	6xØ13	20	1050	5,1	46,3	6,2	21,0	MGV34200753CO13	43,0	MGV34201803CO14
		1	320	10xØ8	17	651	8,1	119,4	15,9	18,9	MGV34201203CO13	35,3	MGV34202393CO14
			400	10xØ10	17	814	8,1	95,5	12,7	23,6	MGV34201203CO13	44,2	MGV34202393CO14
			480	9xØ12	20	976	8,1	79,6	10,6	28,4	MGV34201203CO13	40,0	MGV34201803CO14
			520	6xØ13	20	1050	8,1	73,5	9,8	21,0	MGV34200753CO13	43,0	MGV34201803CO14
		1,6	320	10xØ8	17	651	13,0	191,0	25,5	36,0	MGV34202393CO13	67,6	MGV34202402CO14
			400	10xØ10	17	814	13,0	152,8	20,4	33,3	MGV34201803CO13	65,9	MGV34203803CO14
			480	9xØ12	20	976	13,0	127,3	17,0	40,0	MGV34201803CO13	79,0	MGV34203803CO14
			520	6xØ13	20	1050	12,9	117,5	15,7	30,5	MGV34201203CO13	57,0	MGV34202393CO14
		2	320	10xØ8	17	651	16,3	238,7	31,8	36,0	MGV34202393CO13	67,6	MGV34202402CO14
			400	10xØ10	17	814	16,3	191,0	25,5	44,9	MGV34202393CO13	84,5	MGV34202402CO14
			480	9xØ12	20	976	16,3	159,2	21,2	40,0	MGV34201803CO13	79,0	MGV34203803CO14
			520	6xØ13	20	1050	16,2	146,9	19,6	43,0	MGV34201803CO13	85,0	MGV34203803CO14
		2,5	320	10xØ8	17	651	20,3	298,4	39,8	42,8	MGV34203003CO13		
			400	10xØ10	17	814	20,3	238,7	31,8	44,9	MGV34202393CO13	84,5	MGV34202402CO14
			480	9xØ12	20	976	20,3	198,9	26,5	53,9	MGV34202393CO13	101,4	MGV34202402CO14
			520	6xØ13	20	1050	20,2	183,6	24,5	58,0	MGV34202393CO13	109,0	MGV34202402CO14
		3	320	10xØ8	17	651	24,4	358,1	47,7	52,7	MGV34203803CO13		
			400	10xØ10	17	814	24,4	286,5	38,2	53,5	MGV34203003CO13		
			480	9xØ12	20	976	24,4	238,7	31,8	53,9	MGV34202393CO13	101,4	MGV34202402CO14
			520	6xØ13	20	1050	24,2	220,4	29,4	58,0	MGV34202393CO13	109,0	MGV34202402CO14
	1600	0,63	320	10xØ8	17	812	6,4	75,2	10,0	16,2	MGV34200753CO13	33,3	MGV34201803CO14
			400	10xØ10	17	1016	6,4	60,2	8,0	20,3	MGV34200753CO13	41,6	MGV34201803CO14
		1	320	10xØ8	17	812	10,2	119,4	15,9	23,6	MGV34201203CO13	44,1	MGV34202393CO14
			400	10xØ10	17	1016	10,2	95,5	12,7	29,5	MGV34201203CO13	55,1	MGV34202393CO14
		1,6	320	10xØ8	17	812	16,2	191,0	25,5	44,9	MGV34202393CO13	84,3	MGV34202402CO14
			400	10xØ10	17	1016	16,2	152,8	20,4	41,6	MGV34201803CO13	82,2	MGV34203803CO14
		2	320	10xØ8	17	812	20,3	238,7	31,8	44,9	MGV34202393CO13	84,3	MGV34202402CO14
			400	10xØ10	17	1016	20,3	191,0	25,5	56,1	MGV34202393CO13	105,4	MGV34202402CO14
		2,5	320	10xØ8	17	812	25,4	298,4	39,8	53,4	MGV34203003CO13		
			400	10xØ10	17	1016	25,4	238,7	31,8	56,1	MGV34202393CO13	105,4	MGV34202402CO14
		3	320	10xØ8	17	812	30,5	358,1	47,7	65,8	MGV34203803CO13		
			400	10xØ10	17	1016	30,5	286,5	38,2	66,7	MGV34203003CO13		
	2000	0,63	320	10xØ8	17	997	7,9	75,2	10,0	19,9	MGV34200753CO13	40,8	MGV34201803CO14
		1	320	10xØ8	17	997	12,5	119,4	15,9	29,0	MGV34201203CO13	54,1	MGV34202393CO14
		1,6	320	10xØ8	17	997	19,9	191,0	25,5	55,1	MGV34202393CO13	103,5	MGV34202402CO14
		2	320	10xØ8	17	997	24,9	238,7	31,8	55,1	MGV34202393CO13	103,5	MGV34202402CO14
		2,5	320	10xØ8	17	997	31,2	298,4	39,8	65,5	MGV34203003CO13		
		3	320	10xØ8	17	997	37,4	358,1	47,7	80,7	MGV34203803CO13		